

INSTALLATION INSTRUCTION FOR 6360-281

For Wall Mount Light Fixtures

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

READ AND SAVE THESE INSTRUCTIONS

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary. Remove old fixture and all mounting hardware from wall junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to loose any small parts necessary for installation.

MOUNTING THE FIXTURE (FIG.1)

3. Secure back plate (A) to outlet box (not provided) with outlet box screws (B) through slotted holes in back plate.

CONNECTING THE WIRES (Fig. 2)

4. Connect the fixture wires to the junction box wires as shown in Fig. 2. Make sure all wire connectors are secure and do not easily pull off with a slight tug. If there is no Green Ground Wire from the junction box, connect the Fixture Ground Wire to the Circular Strap or the Crossbar with the Green Screw provided.
5. Tuck these wire connections neatly into the wall junction box.
6. Raise the face plate (C) to back plate (A), and the secure face plate(C) with screws (D) by wrench (E)

COMPLETING THE INSTALLATION

7. Install the proper light bulbs for your fixture.
DO NOT EXCEED THE SPECIFIED WATTAGE!
8. Place the glass (I) into the socket (F) with onto the small cap (G), then Place the glass (J) into the glass (I) with onto the big cap (F).

Return the power to the junction box and test the fixture. Your installation is now complete.

Fig.1


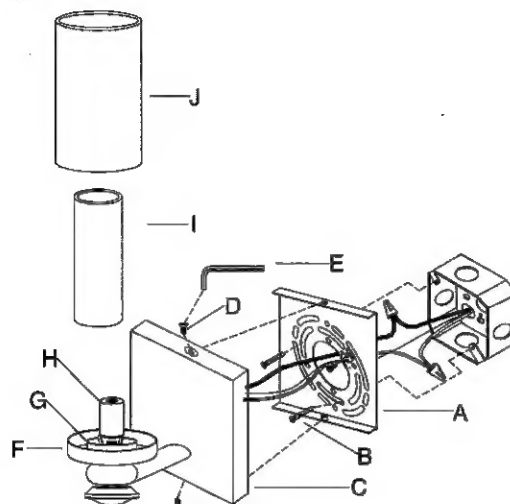


Fig.2



© Minka Lighting, Inc.

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.

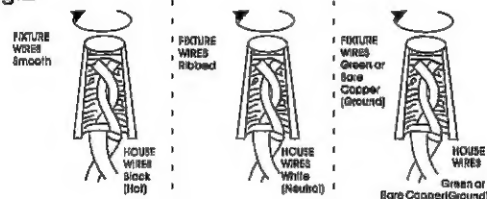

american
lighting
association